HENNINGSEN & STECKMEST: SCALAR 36 / DS / DECKSSALON





The Scalar 36 is the perfect companion on long see journeys, through its rounded, soft under water lines, its high freeboard, its high amount of ballast holding – even rough trips.

The ideally adjusted rig fitments lend safety in every situation.

The Scalar 36 DS combines the positive features of the sailing version with the comfort of a modern deck-salon-yacht. Enjoy the panorama view across the harbor, or navigate the yacht from inside in bad weather.

The Scalar 36 DS elongates your sailing season without any compromises in sailing performance.


Up until now the furnishing has been carried out in ten different ways to fulfill the owner's wishes.

Highlights

- · Classic under water ship
- · See mobility
- · Easy to handle even in bad weather
- · more than 10 types of furnishing



HENNINGSEN & STECKMEST: SCALAR 36 / DS FURNISHING SUGGESTIONS

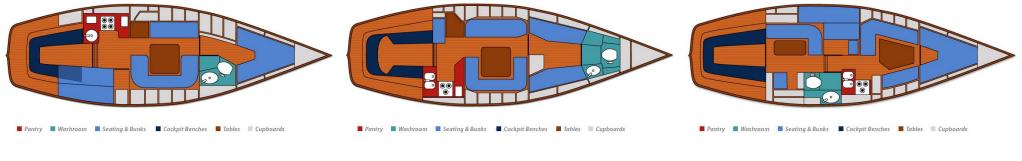

Standard Version Owner Version Standard Version DS

Furnishing suggestion:

Handcrafted building offers us the possibility of furnishing in accordance with your personal wishes.

The pictures of furnishing are only possibilities, of how it could be done. We would be happy to accommodate your ideas and developed your personal version.

Scalar 36:

Apart from the standard version the Scalar 36 is built in different versions to accommodate owners wishes.

The pictures only depict possibilities of how the furnishing can be done and is only part of the possibilities, in which your own wishes still have enough room.

Scalar 36 DS:

The Scalar 36 DS can be delivered with a comfortable L-sofa in the deck salon. The higher seating position gives you the perfect view over the harbor. On the starboard side of the deck salon is completely reserved for the inside steering column. Under deck you will find the roomy pantry, a second salon and four berths, divided from a cabin in the bow. For this Scalar it is also possible to vary the furnishing.

Data:

Length: 11,00 m
Breadth: 3,40 m
Draught: 1,70 m
Weight: 7,20 t
Sail surface: 57,00 sqm



HENNINGSEN & STECKMEST: SCALAR 36 / DS SAIL PLAN



Mainsail:	25,5 qm
Genoa III:	31,5 qm
Genoa II:	
Genoa I:	43,6 qm
Storm foresail	19,1 qm
Spinnaker:	100,0 qm
Blister:	85,0 qm
Sail surface:	57,0 qm



 Mainsail:
 25,5 qm

 Genoa III:
 31,5 qm

 Genoa II:
 Genoa I:

 Storm foresail
 19,1 qm

 Spinnaker:
 100,0 qm

 Blister:
 85,0 qm

 Sail surface:
 57,0 qm

Sail plan Scalar 36

Sail plan Scalar 36 DS

Informations:

Timeless design and classic materials don't mean your sailing qualities are any less than they should be. For that reason we equip the Scalar 36/DS with sporting double rigging made by our own sail producer CO-Segel.

From the high quality Sails too extreme cut sport sails, anything can be produced.

The Scalar 36 is always delivered with fore and mainsail.

If so wished we can deliver your Scalar with the following Sails:

- · Roll genoa
- · Roll groß (mast)
- · Roll groß (boom)
- · Spinnaker
- ·Blister
- · Additional fore sail
- Kutterstag





Specifications and standard-delivery for Scalar-Yachts

The hulls

are produced using compact laminate with 4 continuous stringer. The use of best Resin and high amount of fiber glass ensure a very resistant hull. Keel and skeg are connected seamlessly. The lead ballast is fixed to the hull from above and is covered with GfK-laminate. On top of that a strong mahogany floor construction is constructed, that is then laminated into the hull. All bulkheads stand on foam strips and are laminated on both sides. Specially strengthened bulkheads are able to hold the welded steel construction.

Steering gear Scalar 36 and 36 DS

Wheel steering Type: Whitlock, GfK-oar blade with 40mm Niro-Loom, 3 times embedded, Niro-oar-sagger, Niro-foot fitting, Control column with retaining clip and Ball compass, emergency tiller.

Steering gear Scalar 34

50 mm V4A Loom with welded anchor arm. Partially pre-balanced GfK-oar blade, 3-times embedded, GfK-oar-sagger fitted above with a roller-bearing, oar tiller with telescope, Tiller boom. 2 Suunto-Compasses in the assembling back wall.

Steering gear Scalar 31

Built in the same way as the Scalar 36 but with a 30 mm Niro loom und glueshape oar tiller with Boom, 2 Suuntocompasses in assembling back wall.

Deck

is built in the conventional way. The deck beams are bolted to the hull and a piece of 8 mm thick glued plywood. On top of this holohedral the 15 mm thick teak-stab deck is glued. Only by doing so we can make a teak deck without a stopper, jointing is poured with Sika 290 DC, teak-foot-rail.

Cockpit

is self-bailing with 2 drains 1/2". The Cockpit floor is easy to open, so as to reach the motor and the storage space easily. Seating und floor 8 mm Plywood with 15 mm Teak-Wooden floor. The cockpit coaming is mahogany glueshape and has 4 Caissons. The storage space is divided and fitted with brims. Main-bulkhead-lining with traveler, hand bail pumps.

Cabin assembling

Side walls in 24 mm mahogany- blueshape gilled deck beams, one layer of 8 mm thick plywood, 15 mm teak-wooden floor holohedraly glued, Moonlight-windows can partially be opened, aluminium-fronthatch with Plexiglas panes, teak-hand rail, niethegang with teak bulkheads and sliding hatch. The mahogany build and the cockpit are stained and varnished inside and out.

Furnishing

is Khaya-mahogany and varnished in a silky-matt finish. Niethegang made of teak, floor varnished and fitted with a carpeted floor.

HENNINGSEN & STECKMEST: SPECIFICATIONS



Pantry Scalar 36/36 DS und 34

3-flame gas cooker with oven, Niro-Double sink with a panning tap, Insulated cooling box, Storage space, bin-box, china glasses for 6 people fixed seaworthy. The wok surfaces are coated with formica.

Pantry Scalar 31

The same type of build, but with a 2-flame cooking/washing-up-table section, owner version with oven.

Gas-construction

From DVGW-608 with inspection document, two 5-kg-bottles with a Niro-controller in a separate case with drain, copper gas line to the user with a regulating tap.

WC-washroom

Formica coated walls and Cupboard fronts, varnished mahogany-Frame, Pump WC RM deluxe, steel covered water provision, Top cupboards with doors, Towel hooks, mirror, water provision for wash room and pantry through powerful pressure pump with 8 ltr compensation canister with foot pump = Scalar 31. Dejection tank with display und Decks disposal.

Bow

2 bunks in V-shape with insertion triangle, Top cupboards with sliding doors, under the bunks there is a great amount of storage space and GfK-water tank, Scalar 34 GfK-water tank (200 ltr) in the Keel, hull sides dressed with wooden ceiling. All padding in 10 cm foam, the cover material can be chosen(price generally around 60,00 Euro/sqm), carpeted floor 20,00 Euro/sqm, Curtains15,00 Euro/m).

E-construction

Batteries-Nautical Gel: Start 67 AH, User 130 AH, separate electrical circuit, Automatic charging through Rotary current-light machine, Battery-main cutout, machine cutout for the separate user, Switchboard with main switch, Volt- abd Ammeter, Plug, approved Position lamps, deck lights, Compass lighting. All rooms are fitted with adequate work and reading lamps.

Deck equipment

Sea rails made of Niro, pulpit with passage a. footboard, pushpit with passage and bathing ladder, Niro-railing shoring with 2 drafts, 1 rescue collar am pushpit, Steven fitting with anchor roll and fairlead, 4 belaying cleats, 2 Spring clamps, 4 moorage lines a 10 m, 4 Fenthe, anchor boxes on the foredeck, CQR plow barrier with 40 m lines and chain feed, 2 geuoa rails with Vibrating grinder, filler for Thesel and Water, boat hooks, flagstaff, 2 two-gear-sheet-winding Niro, (40er=Scalar 31, 46er=Scalar 34 and 36/36DS), spray hood with hard front pane auf GfK-console, on the Scalar 36 and 34 with instrumental space.





Rig

Mast a. boom Selden: Aluminium-silver anodized, Windex, Mast with empty cable pipe, Standing gear made of Niro 7 u. 8 mm, Current gear made of pre-stretched cordage: 1 main stay, 1 jib stay, 1 topping lift, 1 Dirk, 1 boom niethe fetcher, 2 fall winds, Selden-mooring-reef system, reef winds an back boarder Mast, Spinnaker rail with vibrating grinder, 1 main sail with 2 reef lines, Sail sign a. Number, 1 genoa I, fore sheet.

Motor Scalar 36/36 DS

Yanmar 4 Zylinthe 4 JH 4 E, 36,7 kw/54 PS two-circuit-cooling

Motor Scalar 34

Yanmar 3YM3oG, 3 Zylinthe, 21 kw/29 PS, two-circuit-cooling

Motor Scalar 31

Yanmar 3 Zylinthe 3 YM3oG, 3 Zylinthe, 21 kw/29 PS, two-circuit-cooling

Furthermore

Rotary current -Light machine, Swinging metal storage, GfK-motor fundament with oil basin, single-arm-control, Instrumental board with display for: Temperature, oil pressure, rotary speed, and Tank content. Hard shafting with 25 mm Niro-arbor = Scalar 31 and 34, 30 mm Niro-arbor = Scalar 36 u. 36 DS and Volvo-swing fixed propeller, GfK-Thesel tank in the Keel: 100 ltr = Scalar 31, 110 ltr = Scalar 34, 180 ltr = Scalar 36 u. 36 DS. All Out-board-executions under water can be done through ball valves. We only use hose clamps that don't rust. The under-water-ship is painted twice with tar oxidant and two antifouling substances.

The ship is transferred to you in a state in which it is ready to be sailed right away.

No guarantee for prices or possible mistakes.

Yacht- und Dockyard Henningsen & Steckmest

Owner Rolf Steckmest

Grauhöft 7 24376 Kappeln / Germany

Telephone: +49 46 42 / 38 05 Telefax: +49 46 42 / 37 55

info@scalaryachten.de www.scalaryachts.com